## **Senior Laboratory**

PHYC 493L, Spring 2022

Classes: MW, 8 am – 11 pm

M, 11 am – 12 pm

**Location**: PAIS 1417

**Instructor**: Tara Drake

Email: drakete@unm.edu

Office: PAIS 2234 and CHTM 118B

**Teaching Assistant**: Josef Sorenson

Email: sorensonj@unm.edu

Research Group	Reported value
Yale	15
Waterloo	15
UNM	12
UCSB	15

Research Group	Reported value
Yale	15 ± 7
Waterloo	15 ± 8
UNM	12 ± 2
UCSB	15 ± 4

Research Group	Reported value
Yale	15 ± 7 g/cm <sup>3</sup>
Waterloo	15 ± 8 g/cm <sup>3</sup>
UNM	12 ± 2 g/cm <sup>3</sup>
UCSB	15 ± 4 g/cm <sup>3</sup>



Density of gold =  $19.3 \text{ g/cm}^3$ 

Density of lead =  $11.4 \text{ g/cm}^3$ 

Research Group	Reported value
Yale	15 ± 7 g/cm <sup>3</sup>
Waterloo	15 ± 8 g/cm <sup>3</sup>
UNM	12 ± 2 g/cm <sup>3</sup>
UCSB	15 ± 4 g/cm <sup>3</sup>




Density of gold = 19.3 g/cm<sup>3</sup> Density of lead = 11.4 g/cm<sup>3</sup>

Conclusion: It is very important to understand the reported errors on the UNM measurement.


#### Uncertainty is Necessary

- In research, a measurement without the uncertainty quoted is wrong.
- "Error" does not mean mistake
- Important related ideas:
  - Error and Uncertainty
  - Accuracy vs. Precision
  - Statistical vs. Systematic Uncertainty
  - Significant Figures
  - Resolution
  - Uncertainty in fitted data: errors on parameters vs. goodness of fit


## A word on Precision and Accuracy

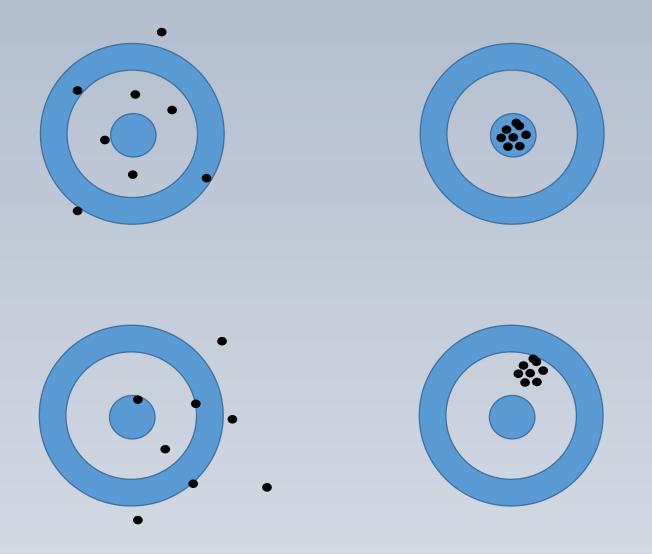


## A word on Precision and Accuracy




Large statistical uncertainty Small systematic uncertainty

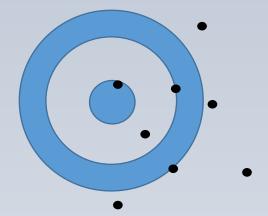

Large statistical uncertainty Large systematic uncertainty




Small statistical uncertainty Small systematic uncertainty



Small statistical uncertainty Large systematic uncertainty

### A word on Precision and Accuracy

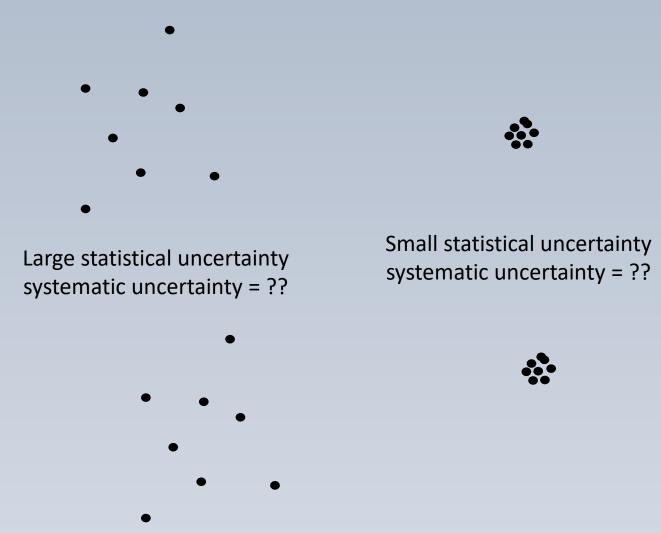

Large statistical uncertainty
systematic uncertainty = ??

Small statistical uncertainty systematic uncertainty = ??

It is always necessary to evaluate experimental/systematic sources of error/uncertainty, no matter how "good" your data.

Precision scientists often use "blinds" to prevent researchers from biasing data while it is being taken.

"We have learned a lot from experience about how to handle some of the ways we fool ourselves. One example: Millikan measured the charge on an electron by an experiment with falling oil drops, and got an answer which we now know not to be quite right. It's a little bit off because he had the incorrect value for the viscosity of air. It's interesting to look at the history of measurements of the charge of an electron, after Millikan. If you plot them as a function of time, you find that one is a little bit bigger than Millikan's, and the next one's a little bit bigger than that, and the next one's a little bit bigger than that, until finally they settle down to a number which is higher.

"Why didn't they discover the new number was higher right away? It's a thing that scientists are ashamed of—this history—because it's apparent that people did things like this: When they got a number that was too high above Millikan's, they thought something must be wrong—and they would look for and find a reason why something might be wrong. When they got a number close to Millikan's value they didn't look so hard. And so they eliminated the numbers that were too far off, and did other things like that ..."

 The least significant digit tells you to what precision you've measured that value.

#### **Examples:**

- 200.00<mark>6</mark> meters
  - → How many sig. figs.?
  - → What is the measurement precision? (order of magnitude)

 The least significant digit tells you to what precision you've measured that value.

**Examples:** (How many sig figs? LSD?)

- 0.0032
- 32.00
- 320

 The least significant digit tells you to what precision you've measured that value.

**Examples:** (How many sig figs? LSD?)

• 320 (ambiguous!)

#### **Breaking ambiguity:**

320.

 $3.2e2 \text{ or } 3.2x10^2$ 

320 +/- 10

→ Why does the last case break ambiguity?

- Adding or subtracting:
  - Answer has same LSD as the least precise measurement

$$13.05 s + 10.2 s$$

103.42 - 0.42

- Multiplying or Dividing:
  - Answer has same number of sig. figs. as the measurement with fewest sig. figs.

13.05\*10.0

1105/5.0

$$3.0 \pm 0.7$$
 cm =  $3.0(7)$  cm

• Either:

$$3.0 \pm 0.7$$
 cm, or  $3.0(7)$  cm

Almost always rounded to one sig fig:  $3.0052 \pm 0.0004$  cm

• Either:

$$3.0 \pm 0.7$$
 cm, or  $3.0(7)$  cm

Almost always rounded to one sig fig:

$$3.0052 \pm 0.0004$$
 cm

 Last sig fig in answer should usually be same order of magnitude as uncertainty

3.0 ± 0.9004 cm

$$3.0 \pm 0.7 \text{ cm}$$
Not
 $3.0 \pm \sqrt{0.5} \text{ cm}$ 

# Mathematics of Error Propagation

#### Addition of measurements

10.7(3) ft + 9.3(4) ft

#### Addition of measurements

$$10.7(3)$$
 ft +  $9.3(4)$  ft

$$= 20.0(5)$$
 ft

\*Error reported = 
$$\sqrt{(error1)^2 + (error2)^2}$$

\*for uncertainties which are independent and random

#### Subtraction of measurements

10.7(3) ft - 9.3(4) ft

#### Subtraction of measurements

$$= 1.4(5) ft$$

Error reported = 
$$\sqrt{(error1)^2 + (error2)^2}$$

**Note**: Subtraction of large and similarly valued measurements can lead to a <u>big</u> increase in fractional uncertainty

# Multiplication or Division of measurements

1.4(1) kg \* 3.5(5) m/s<sup>2</sup>

# Multiplication or Division of measurements

$$1.4(1) \text{ kg * } 3.5(5) \text{ m/s}^2$$

$$= 4.9(8) N$$

$$z = x * y$$

$$\frac{dz}{z} = \sqrt{\left(\frac{dx}{x}\right)^2 + \left(\frac{dy}{y}\right)^2}$$

(for uncertainties which are independent and random)

# General formula for error propagation

$$y = f(x)$$

$$\delta y = \left| \frac{dy}{dx} \right| * \delta x$$

$$y = f(x_1, x_2, ..., x_N)$$

$$\delta y = \sqrt{\left(\left|\frac{\partial y}{\partial x_1}\right| * \delta x_1\right)^2 + \dots + \left(\left|\frac{\partial y}{\partial x_N}\right| * \delta x_N\right)^2}$$

(for uncertainties which are independent and random)

# Reporting uncertainty in your lab reports

- When reporting uncertainties, tell the reader where they come from. (You do not need to include the calculations in the report—but it needs to be in your lab notebook.) These could be:
  - The error bar on a fit. (A fit (to the expected function) gives a rate of 4.0(1) liters/s.)
  - The resolution of an instrument you used to measure. ("The analyzer had a resolution bandwidth of 100 kHz.")
  - The standard deviation on repeated measurements. (We measure 100(9) counts per minute.)
- Most often, one source of uncertainty dominates the uncertainty in your results. Learn to identify this!

# Reporting uncertainty in your lab reports

- When reporting uncertainties, tell the reader where they come from. (You do not need to include the calculations in the report—but it needs to be in your lab notebook.)
- Most often, one source of uncertainty dominates the uncertainty in your results. Learn to identify this!
- Do not try to combine statistical deviation and uncertainty of in measuring devices. Report these separately!

# Mean and standard deviation Mean:

$$\mu = \frac{x_1 + x_2 + \dots + x_N}{N}$$

(Population) Standard Deviation:

$$\sigma = \sqrt{\frac{\sum_{i=1}^{N} (x_i - \mu)^2}{N}}$$

Sample Standard Deviation:

$$\sigma = \sqrt{\frac{\sum_{i=1}^{N} (x_i - \mu)^2}{N - 1}}$$


#### Homework #1

Handout will be emailed this evening, due 2/7 (1 week) by email.

Should be quick (~1 hr), testing comprehension.

Slides will be posted by 2/2.

#### Error Analysis: an excellent reference

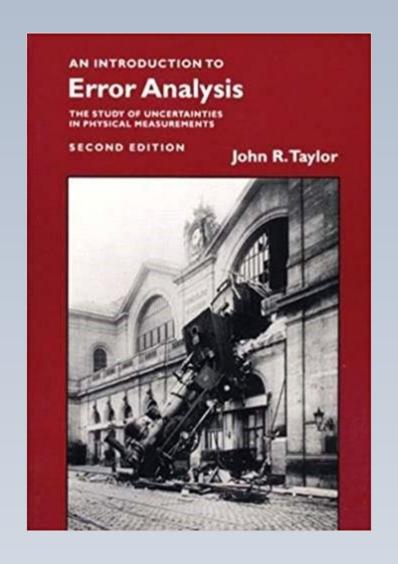

#### Coming Up:

- Lab report 1: lab sessions finish 2/14, report due
   2/21.
- Detailed instructions for lab reports given 2/7 at 11 am.
- Homework 1: uncertainty and error propagation, due 2/7 (sent 1/31).
- Oral Presentations: topics given in 1-2 weeks

